





## **USA OFFICE**

3602 Browns Mill Road SE Atlanta, GA 30354 EMAIL: info@veerubberusa.com WWW.VEERUBBERUS.COM

## THAILAND HEAD OFFICE


924 Vee Rubber building, Rama 9 Road,Bangkapi, Huay-Kwang, Bangkok 10310, Thailand EMAIL: info@veerubber.co.th WWW.VEERUBBER.CO.TH







Size	Size Ply rating		oe	Standard	Metric	Maximum load	inflation Pressure
		TL	TT	rim - Inch		kgs / lbs	Kpa / Psi
15.5-25	12	•		12.00	1278	3250 / 7150	250 / 36
15.5-25	16	•		12.00	1278	3750 / 8250	325 / 47
17.5-25	16	•		14.00	1348	4250 / 9350	300 / 44
17.5-25	20	•		14.00	1348	5000 / 1100	400 / 58
20.5-25	20	•		17.00	1493	6000 / 13200	325 / 47
20.5-25	24	•		17.00	1493	6700 / 14770	400 / 58

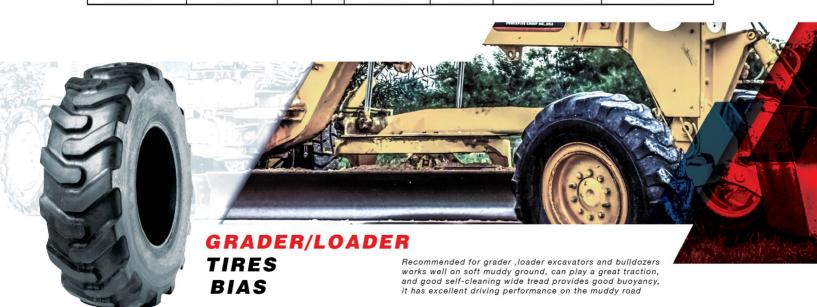

Size	Ply rating	Ty TL	pe TT	Standard rim - Inch	Metric	Maximum load kgs / lbs	inflation Pressure Kpa / Psi
1400-24	12	•	•	8.00 TG	1348	3075 / 6800	250/36
1400-24	14	•	•	8.00 TG	1348	3450/7600	300 / 44








Size	Ply rating	Ty; TL	oe TT	Standard rim - Inch	Metric	Maximum load kgs / lbs	inflation Pressure Kpa / Psi
11.2-24	8	•		10.00	1103	1150 / 2540	250 / 36
11.2-38	8	•		10.00	1205	1000 / 2200	180 / 26




Size	Ply rating	Typ TL	oe TT	Standard rim - Inch	Metric	Maximum load kgs / lbs	inflation Pressure Kpa / Psi
10-16.5	8	•		8.25	773	1880 / 4140	415 / 60
12-16.5	12	•		9.75	831	2865 / 6320	550 / 80
14-17.5	14	•		10.50	921	3875 / 8540	550 / 80
15-19.5	14	•		11.75	1019	4565 / 10060	485 / 70





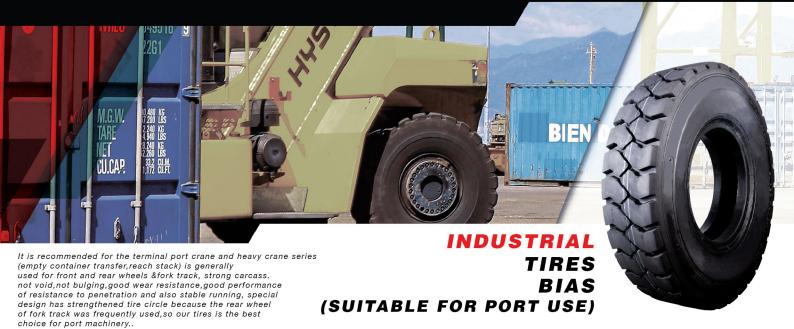

Size	Ply rating	Туре		Standard rim - Inch	Metric	Maximum load kgs / lbs	inflation Pressure Kpa / Psi
		TL	TT			ngo / ibo	napa / r or
12.00-20	28		•	8.50	1150	8520 / 18783	1027 / 149

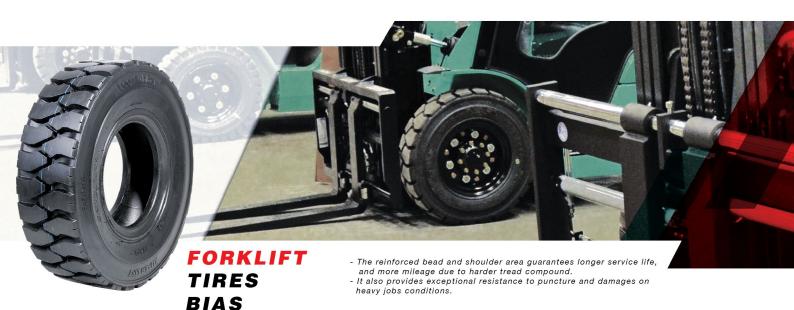

Size	Ply rating	Туре		Standard rim - Inch	Metric	Maximum load kgs / lbs	inflation Pressure Kpa / Psi
		TL	TT			go / 1.00	
500-8	8		•	3.00	469	830 / 1830	790 / 115
690/600-9	10		•	4.00	545	1515 / 3340	860 / 125
650-10	10		•	5.00	597	1725 / 3805	790 / 115
700-12	12		•	5.00	683	2445 / 5395	860 / 125
700-15	14		•	6.00	762	3090 / 6810	1000 / 145
28 X 9 - 15 ( 8.15-15 )	14		•	7.00	706	3075 / 6775	970 / 140
825-15	14		•	6.50	847	3830 / 8445	830 / 120

(PNEUMATIC)