



Vee Rubber

PERFORMANCE TIRES

MADE IN THAILAND

• ORIGINAL •

THE VALUE OF
INNOVATION



EDITION :: 25

CONTENTS

ALL SEASON



WINTER



COMMERCIAL



SPECIALITY



■ ALL SEASON	1
PASSENGER	
CITY STAR V2	2
ZILENT	3
VITRON	5
VITRON ZR	7

CROSSOVER	
VITRON CROSS	9
KRUZER	10

SUV/LT	
TAIGA-D	11
TAIGA H/T	12
TAIGA A/T	13
TAIGA M/T	14

■ WINTER	15
PASSENGER	
WINTER SEASON	17
WINTER SEASON II	19

SUV/LT	
WINTER SEASON IV	20
TAIGA ICE AXE	21

■ COMMERCIAL	23
MARATHON EVO	24
V 22	25

■ SPECIALITY	26
TRAILER	
TRAIMATE 341	27
TRAIMATE 330	28
TRAIMATE 307	29
CITY STAR V2 (TRAILER)	30
VINTAGE	
V329	31


Mission Statement

Our mission is to manufacture high-quality products that meet or exceed our customer's expectations in performance, quality, and value. Through continuous improvement and responsiveness to customer needs, we seek to be a valued and trusted partner to our customer's business. We endeavor to treat all customers, partners and suppliers with respect and dignity and we are always willing to go the extra mile for them.

As a company and as individuals, we recognize a sacred responsibility to act in ways that will benefit the company and therefore benefit each person who works for it. We strive to create work environments where our employees can meet their potential and thrive in an atmosphere of excellence. We seek daily to achieve profitable growth through superior customer service, innovation, quality and commitment.

We are also part of a much larger community to which we are compelled to act responsibly, to do what is in our power to help protect our environment, to provide economic opportunity, to work safely, and to consider the impact of our actions on others.

All of our long-term strategies and short-term actions will be guided by this set of core values that are shared by each and every associate.

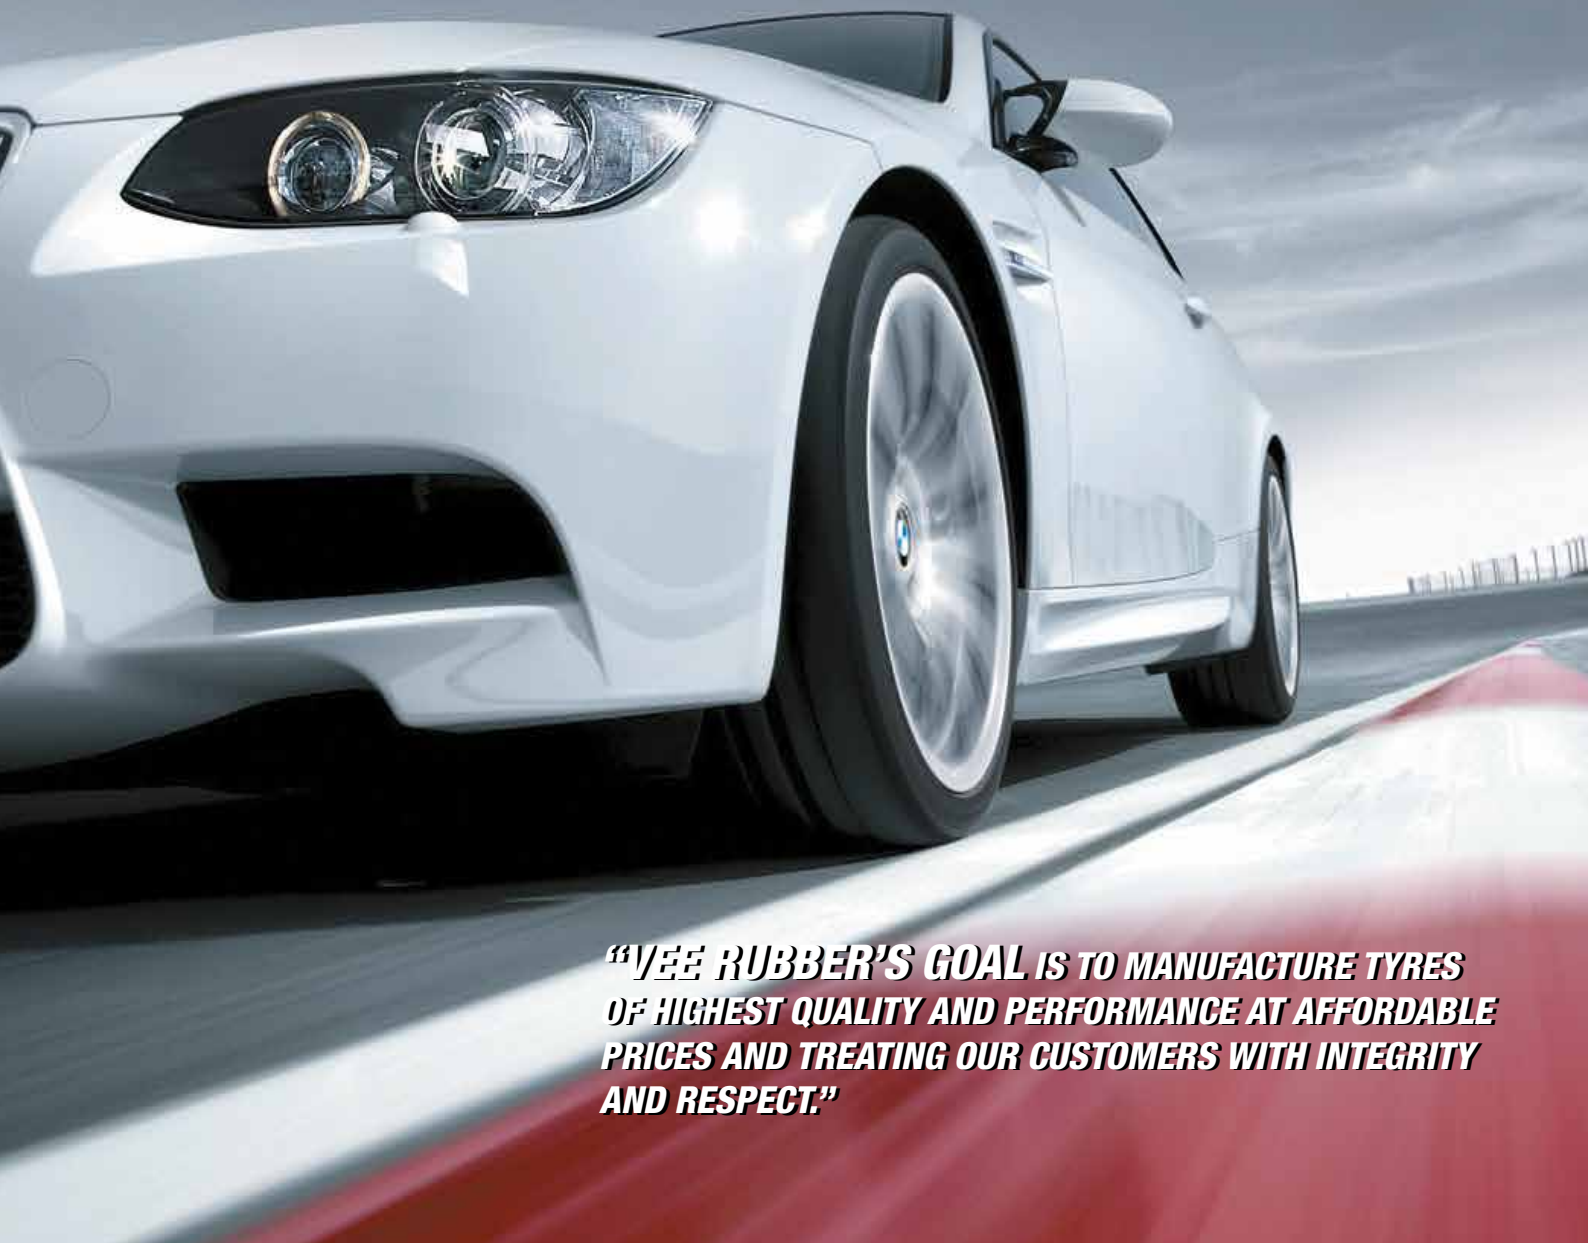

"VEE RUBBER'S GOAL IS TO MANUFACTURE TYRES OF HIGHEST QUALITY AND PERFORMANCE AT AFFORDABLE PRICES AND TREATING OUR CUSTOMERS WITH INTEGRITY AND RESPECT."

■ ALL SEASON



CITY STAR V2



- Classic City Style
- Comfortable Ride
- All-Season Performance
- Sophisticated Tread Design for Low Noise, Fuel Economy, And Outstanding Value.

For : Passenger

Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
135/80 R13	70T	V31218	9.6	7.6	5.2	132	21.7	551	36	738	400 AA	3.5
145/80 R10	69T	V31232	8.2	6.5	5.5	140	19.4	493	36	716	400 AA	3.5
145/80 R13	75T	V31201	9.8	7.8	5.8	147	22.1	561	35	853	400 AA	4.0
145/70 R13	71T	V31205	8.3	6.6	5.9	150	21.2	538	36	1422	400 AA	4.5
155/80 R13	79T	V31202	10.5	8.3	6.2	157	22.9	582	35	963	400 AA	4.5
155/70 R13	75T	V31206	9.3	7.4	6.1	155	21.7	551	36	853	400 AA	4.5
155/65 R14	75T	V31237	9.3	7.4	6.2	157	21.9	556	36	853	400 AA	4.5
165/80 R13	83T	V31203	9.8	7.8	6.4	163	23.1	587	36	1073	400 AA	4.5
165/70 R13	79T	V31207	9.4	7.5	6.7	170	22.2	564	36	963	400 AA	5.0
165/70 R14	81T	V31210	8.7	6.9	6.7	170	23.3	592	36	1018	400 AA	5.0
165/65 R14	79T	V31219	9.3	7.4	6.7	170	22.4	569	36	963	400 AA	5.0
165/65 R15	81T	V31216	8.8	7.0	6.3	160	23.4	594	36	1018	400 AA	5.0
175/70 R13	82T	V31208	10.5	8.3	7.0	178	22.8	579	36	1047	400 AA	5.0
175/70 R14	88T	V31211	10.5	8.3	7.0	178	24.1	612	36	1234	400 AA	5.0
175/65 R13	80T	V31214	9.2	7.3	6.9	175	22.0	559	36	992	400 AA	5.0
175/65 R14	82T	V31215	10.6	8.4	6.7	170	22.9	582	36	1047	400 AA	5.0
175/65 R15	84T	V31217	10.3	8.2	6.8	173	24.2	615	36	1102	400 AA	5.0
185/70 R13	86T	V31209	10.1	8.0	7.5	191	23.5	597	36	1168	400 AA	5.5
185/70 R14	88T	V31212	9.4	7.5	7.4	188	24.4	620	36	1234	400 AA	5.5
195/70 R14	91T	V31213	9.7	7.7	7.8	198	24.6	625	36	1355	400 AA	6.0
195/65 R15 REINF	95T	V31245	9.6	7.6	7.5	191	24.8	630	42	1521	400 AA	6.0



- 5 Rib Tread design with 4 main grooves for handling and water evacuation
- Multi Pitch Variation For Low Noise
- Smooth Ride Comfortable
- Long Mileage
- Excellent Grip On Wet&Dry Condition

Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
145/70 R12	69T	V33501	9.1	7.2	5.8	147	20.0	508	36	716	500 AA	4.5
155/70 R12	73T	V33502	9.4	7.5	6.2	157	20.5	521	36	805	500 AA	4.5
165/70 R12	77T	V33506	11.4	9.0	6.5	165	21.1	536	36	908	500 AA	5.0
165/70 R13	79T	V33520	11.4	9.0	6.5	165	21.1	536	36	963	500 AA	5.0
165/70 R13	79H	V33521	11.4	9.0	6.5	165	21.1	536	36	963	500 AA	5.0
165/65 R13	77T	V33507	10.7	8.5	6.5	165	21.5	546	36	908	500 AA	5.0
165/55 R14	72H	V33513	11.4	9.0	6.7	170	21.2	538	36	782	500 AA	5.0
175/70 R13	82T	V33503	11.4	9.0	7.0	178	22.8	579	36	1047	500 AA	5.0
175/70 R14	88H	V33523	11.4	9.0	7.0	178	23.7	602	42	1234	500 AA	5.0
175/65 R14	82T	V33508	11.4	9.0	7.0	178	22.9	582	36	1047	500 AA	5.0
175/60 R13	77T	V33512	11.4	9.0	7.0	178	21.2	538	36	908	500 AA	5.0
175/60 R13	77H	V33522	11.4	9.0	7.0	178	21.2	538	36	908	500 AA	5.0
185/70 R14	88T	V33504	11.4	9.0	7.4	188	24.4	620	36	1234	500 AA	5.5
185/65 R14	86H	V33509	9.8	7.8	7.3	185	23.3	592	36	1168	500 AA	5.5
185/65 R15	91H	V33528	9.8	7.8	7.3	185	24.4	620	42	1355	500 AA	5.5
185/60 R13	80H	V33529	9.8	7.8	7.4	188	21.7	551	36	992	500 AA	5.5
185/60 R14	82H	V33525	9.8	7.8	7.3	185	22.8	579	36	1168	500 AA	5.5
185/60 R15	88H	V33527	9.8	7.8	7.3	185	23.7	602	42	1234	500 AA	5.5
185/55 R15	82H	V33526	9.8	7.8	7.3	185	23.0	584	36	1168	500 AA	6.0
195/70 R14	95H	V33505	11.4	9.0	7.8	198	24.6	625	42	1521	500 AA	6.0
195/65 R15	91H	V33510	9.4	7.5	8.1	206	25.0	635	36	1355	500 AA	6.0
195/60 R15	88H	V33516	9.4	7.5	7.7	196	24.3	617	36	1234	500 AA	6.0
195/55 R15	85H	V33514	9.6	7.6	7.7	196	23.4	594	36	1135	500 AA	6.0
195/50 R15	82H	V33515	9.4	7.5	7.6	193	22.7	577	36	1047	500 AA	6.0
195/45 R16	80H	V33524	9.8	7.8	7.6	193	22.9	582	36	992	500 AA	6.5
205/65 R15	94H	V33511	9.4	7.5	8.1	206	25.4	645	36	1477	500 AA	6.0
205/60 R14	88H	V33530	9.6	7.6	7.6	193	23.7	602	36	1234	500 AA	6.0
205/55 R16	91H	V33531	9.6	7.6	8.1	206	24.9	632	36	1355	500 AA	6.5
205/45 R17 REINF	88V	V33517	9.6	7.6	8.0	204	24.3	617	46	1234	500 AA	7.0
215/45 R17 REINF	91V	V33518	9.6	7.6	8.2	208	24.6	625	46	1355	500 AA	7.0

DUAL-NATURE TECHNOLOGY



All-Season High Performance

The VITRON is a premium all-season high performance tire featuring a unique asymmetrical tread design, WHICH CAN BE MOUNTED WITH EITHER SIDE OUT, depending on the desired performance characteristics. In turns, centripetal force shifts a car's weight to the outside of the car and the tire. Vee engineered a tire that offer rubber enhanced cornering in different conditions depending on which side is mounted facing outwards.

RED SIDE OUT - The Vee Rubber VITRON has an optimized asymmetrical design to afford more rubber to road contact in corners, and therefore greater dry cornering performance.

BLUE SIDE OUT - Multiple sipes and wide zig-zag grooves ensure the tire has more "biting" cross grooves and sipes for outstanding wet and snow cornering performance.

VITRON

DUAL-NATURE TECHNOLOGY



All-Season High Performance

Significant Features and Benefits of the VITRON include :

FEATURE	BENEFIT
4 LARGE ZIG-ZAG CIRCUMFERENTIAL GROOVES	Provide optimum water evacuation from tread surface to ensure outstanding wet and snow traction
Multitude of horizontal groves and sipes	Create "squeegee" effect allowing rubber to cut through top layer of water on surface of road or ice, enabling traction.
Multiple pitch/phase variation	Contrasting designs on inside outside and pitch variation on outside blocks give the VITRON a remarkably quiet and smooth ride.
Half channel - circumferential Sipe/rip	Enhances wet traction while reducing irregular wear by creating a water channel but also reinforcing the blocks
Constant Contact Design	Ensures equal contact with road at all times reducing vibration and ensuring longer mileage

Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
175/65 R 15	84H	V34021	9.6	7.6	6.6	168	23.7	602	36	1102	500 AA	5.0
185/65 R14	86H	V34005	9.6	7.6	7.5	191	23.2	589	36	1168	500 AA	5.5
185/65 R14	86T	V34028	9.6	7.6	7.5	191	23.2	589	36	1168	500 AA	5.5
185/65 R15	88H	V34006	9.3	7.4	7.2	183	24.3	617	36	1234	500 AA	5.5
185/60 R14	82H	V34010	10.1	8.0	7.3	185	23.0	584	36	1047	500 AA	5.5
185/60 R14	82T	V34038	10.1	8.0	7.3	185	23.0	584	36	1047	500 AA	5.5
185/60 R15	88H	V34035	10.1	8.0	7.2	183	23.7	602	42	1234	500 AA	5.5
195/65 R15	91H	V34007	10.2	8.1	7.8	198	25.0	635	36	1355	500 AA	6.0
195/60 R14	86H	V34011	10.0	7.9	7.8	198	23.1	587	36	1168	500 AA	6.0
195/60 R15	88H	V34001	9.6	7.6	7.4	188	24.0	610	36	1234	500 AA	6.0
195/55 R15	85H	V34004	9.1	7.2	7.7	196	23.4	594	36	1135	500 AA	6.0
195/50 R15	82H	V34013	9.8	7.8	7.3	185	22.4	569	36	1047	500 AA	6.0
**205/70 R15	96T	V34059	10.1	8.0	8.2	208	26.4	671	36	1565	500 AA	6.0
205/65 R15	94H	V34008	9.8	7.8	8.0	203	25.2	640	36	1477	500 AA	6.0
205/60 R15	91H	V34012	10.1	8.0	7.7	196	24.5	622	36	1355	500 AA	6.0
205/60 R16	96W	V34046	10.1	8.0	7.8	198	26.0	660	42	1565	500 AA	6.0
P205/60 R16	92H	V34017	10.1	8.0	7.8	198	26.0	660	36	1389	500 AA	6.0
205/55 R16	91V	V34002	10.1	8.0	8.3	211	25.1	638	44	1355	500 AA	6.5
205/50 R16	87H	V34016	11.3	9.0	7.7	196	24.0	610	36	1201	500 AA	6.5
205/50 R17 REINF	93V	V34036	10.1	8.0	8.1	206	25.1	638	46	1433	500 AA	7.0
205/50 R17 REINF	93W	V34045	10.1	8.0	8.1	206	25.1	638	46	1433	500 AA	7.0
205/45 R17 REINF	88V	V34027	10.0	7.9	8.1	206	25.4	645	44	1234	500 AA	7.0
205/45 R17 REINF	88W	V34044	10.0	7.9	8.1	206	25.4	645	44	1234	500 AA	7.0
205/40 R17 REINF	84V	V34029	10.1	8.0	8.5	216	23.4	594	46	1102	500 AA	7.5
205/40 R17 REINF	84W	V34043	10.1	8.0	8.5	216	23.4	594	46	1102	500 AA	7.5
**215/70 R15	98T	V34060	10.1	8.0	8.6	218	26.8	681	36	1653	500 AA	6.5
215/65 R15	96H	V34009	10.1	8.0	8.4	213	26.1	663	36	1565	500 AA	6.5
**215/65 R16	98T	V34061	10.1	8.0	8.6	218	26.9	683	36	1653	500 AA	6.5
215/60 R16 REINF	99V	V34051	10.1	8.0	8.4	213	26.0	660	42	1708	500 AA	6.5
P215/60 R16	99H	V34055	10.1	8.0	8.4	213	26.0	660	42	1708	500 AA	6.5
P215/60 R16	95H	V34003	11.3	9.0	8.0	203	26.0	660	36	1521	500 AA	6.5
215/55 R17	94W	V34044	9.8	7.8	8.5	216	26.1	663	44	1477	500 AA	7.0
P215/55 R17	94V	V34019	9.8	7.8	8.5	216	26.1	663	44	1477	500 AA	7.0
215/50 R17 REINF	95W	V34049	10.1	8.0	8.4	213	25.4	645	44	1521	500 AA	7.0
215/50 R17	91V	V34018	10.1	8.0	8.2	208	25.4	645	44	1355	500 AA	7.0
215/45 R17 REINF	91V	V34025	10.3	8.2	8.3	211	24.6	625	36	1355	500 AA	7.0
215/45 R17 REINF	91W	V34047	10.3	8.2	8.3	211	24.6	625	36	1355	500 AA	7.0
**225/65 R16	100H	V34062	10.1	8.0	9.0	229	27.5	699	51	1764	500 AA	6.5
225/60 R16	98H	V34014	9.6	7.6	8.7	221	26.6	676	36	1653	500 AA	6.5
P225/60 R17	98V	V34024	10.1	8.0	8.6	218	27.5	699	42	1653	500 AA	7.0
225/55 R16	95V	V34056	10.1	8.0	8.7	221	25.7	653	42	1521	500 AA	7.0
225/55 R17	97V	V34020	11.8	9.4	8.5	216	26.6	676	44	1609	500 AA	7.5
225/55 R17 REINF	101W	V34054	11.8	9.4	8.5	216	26.6	676	44	1818	500 AA	7.5
225/50 R17	94V	V34015	11.8	9.4	9.0	229	26.0	660	44	1477	500 AA	7.5
225/50 R17	98W	V34053	11.8	9.4	9.0	229	26.0	660	44	1653	500 AA	7.5
225/45 R17 REINF	94V	V34026	10.1	8.0	8.6	218	24.9	632	42	1477	500 AA	7.5
225/40 R18 REINF	92V	V34030	10.7	8.5	9.1	230	25.0	636	46	1389	500 AA	8.0
235/60 R16	100T	V34039	10.1	8.0	9.3	236	26.8	681	36	1763	500 AA	7.0
235/60 R16	100H	V34032	10.1	8.0	9.3	236	26.8	681	36	1763	500 AA	7.0
235/60 R18	104H	V34031	10.1	8.0	8.7	221	28.9	734	42	2149	500 AA	7.0
235/60 R18	107H	V34034	10.1	8.0	8.7	221	28.9	734	42	2149	500 AA	7.0
**235/45 R17	97V	V34063	10.1	8.0	9.1	231	25.2	640	42	1609	500 AA	8.0

VITRON ZR

DUAL-NATURE TECHNOLOGY



The VITRON ZR Takes the innovative Dual Nature™ Design To the next level of performance.

FEATURE	BENEFIT
Massive tread Rubber Blocks	Maximize dry traction and rigid support for high speed performance. Plenty of Rubber to Road Contact
Asymmetrical Dual Nature™ Tread Design	Mount either side out depending on the performance desired , one side out for optimized wet cornering performance, the other side out for optimized dry cornering performance
Multiple Pitch Variation Shoulder Blocks	Provides out-of-phase noise cancelation so “pattern noise” is greatly reduced, providing a smooth, quiet ride
4 large and 1 half depth Circumferential Grooves	Massive channels for efficient water evacuation provide excellent wet weather traction.
Angled Cross Grooves and Sipes	Coupled with slightly “zig-zagged” circumferential grooves, provide good all-season traction and eliminate “groove wandering”

Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
215/55 R16	93V	V34321	10.5	8.3	8.5	216	25.3	643	36	1435	380 AA	7.0
225/65 R17	102H	V34317	10.5	8.3	9.0	229	28.5	724	36	1873	380 AA	6.5
225/60 R18	100H	V34316	10.5	8.3	9.0	229	28.6	726	36	1763	380 AA	6.5
225/55 R17	97V	V34320	10.5	8.3	9.0	229	26.8	681	36	1609	380 AA	7.0
225/45 R18	91V	V34322	10.1	8.0	8.9	226	26.0	660	36	1355	380 AA	8.0
235/65 R17	104H	V34309	11.3	9.0	9.3	236	29.0	737	36	1984	380 AA	7.0
235/55 R17	99V	V34314	11.3	9.0	9.4	239	27.2	691	36	1708	380 AA	7.5
235/55 R18	100V	V34315	10.5	8.3	9.4	239	28.2	716	36	1763	380 AA	7.5
235/45 R17	93V	V34318	10.1	8.0	9.3	236	25.4	645	36	1435	380 AA	8.0
235/45 R18	94V	V34323	10.1	8.0	9.3	236	26.4	671	36	1477	380 AA	8.0
235/40 ZR18	91W	V34301	10.0	7.9	9.4	238	25.4	645	42	1355	380 AA	8.5
235/40 R18	91V	V34325	10.1	8.0	9.3	236	25.5	648	36	1355	380 AA	8.5
235/40 ZR18	95W	V34303	10.1	8.0	9.3	236	25.5	648	42	1521	380 AA	8.5
245/50 R18	100V	V34313	11.1	8.8	9.6	244	27.7	704	36	1763	380 AA	7.5
245/45 R17	95V	V34319	11.1	8.8	9.6	244	25.7	653	36	1521	380 AA	8.0
245/45 R18	96V	V34310	11.1	8.8	9.4	238	26.7	678	36	1565	380 AA	8.0
255/55 R18	105V	V34308	10.8	8.6	10.1	257	29.0	737	36	2039	380 AA	8.0
255/50 R18	102V	V34311	11.3	9.0	10.2	259	28.1	714	36	1818	380 AA	8.0
255/45 R18	99V	V34324	10.1	8.0	10.0	254	27.0	686	36	1708	380 AA	8.5
265/35 ZR18	93W	V34302	9.8	7.8	10.6	269	25.3	643	42	1435	380 AA	9.5
265/35 R18	93V	V34312	9.8	7.8	10.6	270	25.3	643	42	1435	380 AA	9.5

VITRON CROSS



Specifically Engineered for Today's Crossovers and SUVs

- 5 Circumferential Grooves For Maximum Water Evacuation And Wet Traction
- Special Ribbed Center Groove For Added Traction In Dirt, Mud And Snow
- Dual Solid Central Ribs For Great On-Center Feel And Load Carrying Capacity
- Dual-Nature™ Asymmetrical Design-One Side Optimized For Wet and the other Optimized for Dry Corners Performance
- Multitude of Cross Grooves And Sipes For Outstanding Wet Traction
- Quiet, Comfortable And Long Lasting Performance

Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
255/65 R18	111S	V34901	12.0	9.5	9.9	251	31.2	792	36	2402	-	7.5
**P215/70 R16	100H	V34902	12.0	9.5	8.7	221	27.9	708	35	1709	-	6.5
**P225/70 R16	103H	V34903	12.0	9.5	9.0	229	28.4	721	35	1819	-	6.5
**225/65 R17	102H	V34904	12.0	9.5	8.8	224	28.5	724	51	1874	-	6.5
**P235/65 R17	103H	V34906	12.0	9.5	9.3	236	29.1	739	51	1984	-	7.0
**P235/60 R17	102H	V34905	12.0	9.5	9.3	236	28.1	714	35	1764	-	7.0
**245/60 R18	104H	V34907	12.0	9.5	9.5	241	29.7	754	51	2059	-	7.0
**245/55 R19	103S	V34909	12.0	9.5	9.7	246	29.6	752	36	1929	-	7.5
**255/60 R19	108H	V34908	12.0	9.5	10.2	259	31.0	787	51	2205	-	7.5



CROSSOVER / SUV TOURING ALL-SEASON

- NON-Directional Tread Design
- 4 Circumferential Grooves – For Wet Traction
- Constant Contact Design
- Pitch Variation – Low Noise

Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
P235/75 R15	109H	V35711	11.3	9.0	9.3	236	29.0	736	36	2272	560 A A	6.5
P245/75 R16	111T	V35713	11.3	9.0	9.6	243	30.6	777	36	2402	560 A A	7.0
P265/75 R16	116T	V35714	11.3	9.0	10.5	266	31.7	805	36	2755	560 A A	8.0
P265/70 R16	112T	V35715	11.3	9.0	10.4	264	30.5	774	36	2468	560 A A	7.5
P225/65 R17	102H	V35707	11.3	9.0	8.9	226	28.8	731	36	1873	560 A A	6.5
245/65 R17	107H	V35709	11.3	9.0	-	-	-	-	36	-	560 A A	-
P235/65 R17	104H	V35710	11.3	9.0	9.3	236	29.4	746	36	1984	560 A A	7.0
P265/70 R17	115T	V35708	11.3	9.0	10.4	264	31.9	810	36	2678	560 A A	8.0
225/55 R18	98H	V35701	11.3	9.0	9.1	231	27.8	706	36	1653	560 A A	7.0
235/65 R18	106T	V35703	11.3	9.0	9.4	239	30.0	762	36	2094	560 A A	7.0
235/50 R18	97V	V35702	11.3	9.0	9.6	244	27.3	693	36	1609	560 A A	7.5
P275/65 R18	116T	V35706	11.3	9.0	10.8	274	31.7	805	36	2755	560 A A	8.0
255/50 R19	103V	V35705	11.3	9.0	10.4	264	29.0	737	36	1929	560 A A	8.0
255/45 R19	100V	V35704	11.3	9.0	10.0	254	28.0	711	36	1763	560 A A	8.0
P275/60 R20	115T	V35716	11.3	9.0	10.8	274	33.3	845	36	2678	560 A A	8.0
P275/55 R20	107H	V35717	11.3	9.0	10.8	274	32.3	820	36	2149	560 A A	8.5
P245/50 R20	102V	V35712	11.3	9.0	9.6	243	30.0	762	36	1873	560 A A	7.5

TAIGA-D



Proven 5-Rib Tread Design For Low Noise, Comfortable Ride And Optimum Wet Traction All Season Performance with VEE RUBBER Durability

Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
225/70 R15	100S	V32201	12.6	10.0	8.9	226	27.4	696	36	1763	300 A B	6.5



Zigzag Circumferential Grooves :

- Provide excellent water evacuation and snow traction

Continuous Large Shoulder Blocks :

- For outstanding cornering grip and a quiet ride

Multiple Cross Grooves And Sipes :

- For "biting" traction that grabs the snow and cuts through water to give improved grip on ice and wet surfaces

Continuous Center Rib Blocks :

- Tied together to provide greater strength, less uneven wear, and improve on-center feel

Constant Contact Design :

- Tread always uniformly in contact with the road to give the best possible traction while ensuring the longest mileage

Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
215/70 R15	98S	V33314	11.3	9.0	8.7	221	26.9	683	36	1653	640 BA	6.5
215/65 R16	98T	V33307	10.5	8.3	8.5	216	27.0	686	36	1653	640 BA	6.5
215/65 R16	102T	V33317	10.5	8.3	8.5	216	27.0	686	36	1873	640 BA	6.5
215/65 R16	99H	V33323	10.5	8.3	8.5	216	27.0	686	36	1708	640 BA	6.5
P225/70 R16	102S	V33327	11.3	9.0	8.9	226	28.4	721	36	1873	640 BA	6.5
P225/65 R17	102H	V33316	10.5	8.3	8.9	226	28.5	724	36	1873	640 BA	6.5
P235/75 R15	105S	V33312	11.0	8.7	9.1	231	28.9	734	36	2039	640 BA	6.5
P235/75 R16	106S	V33313	10.7	8.5	8.9	226	29.8	757	36	2094	640 BA	6.5
P235/75 R16	109S	V33308	10.7	8.5	8.9	226	29.8	757	36	2271	640 BA	7.0
P235/70 R16	104T	V33305	11.3	9.0	9.7	246	29.0	737	36	1984	640 BA	7.0
P235/70 R16	106H	V33325	11.3	9.0	9.7	246	29.0	737	36	2094	640 BA	7.0
P235/60 R16	99T	V33304	11.0	8.7	9.3	236	27.2	691	36	1708	640 BA	7.0
LT245/75 R16	120/116S	V33310	12.9	10.2	9.7	246	30.7	780	80	3042	640 BA	7.0
245/70 R16 REINF	111H	V33326	11.3	9.0	8.8	224	29.6	752	36	2337	640 BA	7.0
P245/70 R16	106S	V33309	11.3	9.0	8.8	224	29.6	752	36	2094	640 BA	7.0
P245/65 R17	105T	V33318	11.3	9.0	9.7	246	29.5	749	36	2039	640 BA	7.0
P255/70 R16	109S	V33306	12.2	9.7	10.0	254	30.0	762	36	2271	640 BA	7.5
P265/75 R16	114T	V33320	11.3	9.0	10.5	267	31.6	803	36	2601	640 BA	7.5
P265/70 R15	111S	V33311	11.3	9.0	10.6	269	29.6	752	36	2337	640 BA	8.0
P265/70 R15	112H	V33321	11.3	9.0	10.6	269	29.6	752	36	2468	640 BA	8.0
P265/70 R15	112H	V33322	11.3	9.0	10.5	267	30.2	767	42	2468	640 BA	8.0
P265/70 R16	111S	V33301	11.3	9.0	10.5	267	30.2	767	36	2402	640 BA	8.0
P265/70 R17	113S	V33303	11.7	9.3	10.4	264	31.8	808	36	2535	640 BA	8.0
265/65 R17	112S	V33302	12.0	9.5	10.5	267	30.4	772	36	2468	640 BA	8.0
265/65 R17	112H	V33324	12.0	9.5	10.5	267	30.4	772	36	2468	640 BA	8.0
P275/55 R20	111T	V33319	11.3	9.0	9.7	246	31.8	808	36	2535	640 BA	8.5
**LT225/75 R16	115/112S	V33333	12.9	10.2	9.1	231	29.3	744	80	2680	640 BA	6.0
**P245/70 R17	108S	V33334	11.3	9.0	9.8	249	30.6	777	35	2205	640 BA	7.0
**P265/70 R18	114S	V33336	11.7	9.3	10.5	267	32.6	828	35	2601	640 BA	8.0

TAIGA A/T



Putting the “All-Terrain” back into A/T tires, the NEW TAIGA A/T offers Outstanding off-road capabilities while still delivering a commanding level of on-road traction, comfort and long life. This “Go Anywhere” tire with its beefy blocks will tear up the dirt, grab the rocks and fling the mud to give you an exhilarating off-road experience. Its precisely-sized and positioned blocks ensure great on-road manners and high-speed performance.

FEATURE	BENEFIT
Zig-zag and Siped. Solid Center Rib	Supports heavy loads, ensures a smooth ride, reduces irregular wear, and enhances on-center feel for confident handling response
Large & Aggressive 2 nd Row and Shoulder Blocks	Tears up the terrain while providing large surfaces for on-road cornering, acceleration and braking.
NO-GO-SNO Circumferential Grooves	Efficiently evacuate water, but do not allow snow to pass through, creating hundreds of “Biting teeth” to grab snow and mud in extreme conditions.
Constant Contact Design	Even this big, aggressive puppy has been designed to have a consistent contact with the road surface ensuring a smooth ride and improved tire longevity
5 Pitch Variation	Shoulder blocks of varying sizes cancel pattern noise

Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
LT215/75 R15	100/97S	V34213	13.9	11.0	8.5	216	21.8	554	80	1763	460 AB	6.0
LT235/85 R16 E	120/116S	V34209	13.9	11.0	9.6	244	31.8	808	80	3042	460 AB	6.5
P235/75 R15	105S	V34202	13.9	11.0	9.5	241	28.9	734	36	2039	460 AB	6.5
P235/70 R16	104T	V34203	13.9	11.0	9.4	239	29.0	737	36	1984	460 AB	7.0
LT245/75 R16 E	120/116R	V34208	13.9	11.0	10.0	254	30.7	780	80	3086	460 AB	7.0
P245/65 R17	107S	V34205	13.9	11.0	9.7	246	29.5	749	36	2149	460 AB	7.0
P245/65 R17	111H	V34214	13.9	11.0	9.7	246	29.5	749	36	2402	460 AB	7.0
P255/70 R16	109S	V34206	13.9	11.0	10.2	259	30.0	762	36	2270	460 AB	7.5
P265/75 R16	114S	V34207	13.9	11.0	10.5	267	31.6	803	36	2601	460 AB	7.5
LT265/75 R16 E	123/120Q	V34210	15.1	12.0	10.8	274	31.7	805	80	3415	460 AB	7.5
P265/70 R16	111S	V34204	14.8	11.7	10.6	269	30.4	772	36	1090	460 AB	8.0
P265/70 R17	113S	V34201	13.9	11.0	10.5	267	31.7	805	36	2535	460 AB	8.0
LT265/70 R17 E	121/118R	V34212	13.9	11.0	11.0	279	31.7	805	80	3196	460 AB	8.0
LT285/75 R16 E	126/123R	V34211	14.9	11.8	11.6	295	32.9	836	80	3745	460 AB	8.0

TAIGA M/T



The TAIGA M/T “MUD TERRAIN” tire that provides Maximum Traction all-terrain performance for pick-up, SUV and Jeep applications. This innovative tire maximizes off-road capabilities while still giving great on-road performance and acceptable comfort at highway speeds. Go anywhere you need to go, any time and in any weather conditions with


The TAIGA M/T features a 4-rib symmetric tread design. Scalloped shoulders provide an aggressive look and increase off-road traction. Vee Rubber’s “Constant Contact” design ensures long mileage and a smooth ride with consistent tread contact with the asphalt. Aggressively shaped large tread blocks, wide circumferential grooves, and zigzag sipes create excellent traction on soft surfaces and remarkable snow traction.

Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
LT225/75 R16 E	115/112Q	V35601	17.5	13.9	8.5	216	29.7	754	80	2678	-	6.0

■ WINTER



- Improved Wet and Snow traction
- Lower Rolling Resistance – fuel saving
- Improved Wear rate – longer life
- Low Temperature pliability for enhanced grip

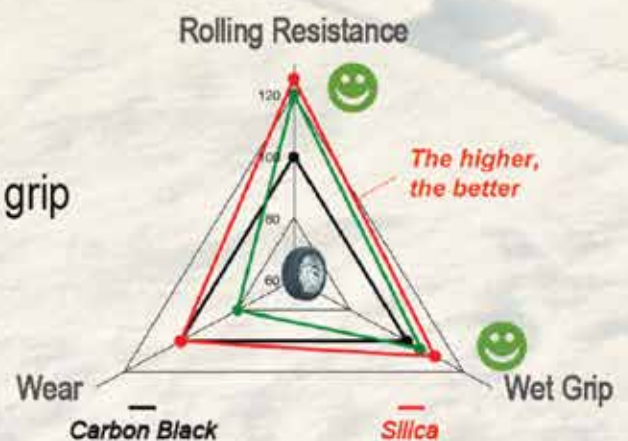



WINTER SEASON



- Multi-Siped Directional Tread Pattern Provides Stylish Design and Confident Winter Performance
- Zigzag Circumferential Grooves Provide “Bite” in Snow
- Silica Compound Ensures Cold Weather Performance
- Severe Service Tested And Approved



WINTER SEASON

Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
125/80 R12C	86N	V31536	8.2	6.5	4.8	122	19.6	498	36	1168	-	3.0
145/70 R13	71T	V31537	9.1	7.2	5.9	150	21.0	533	36	760	-	4.5
145/60 R13	66T	V31534	10.1	8.0	5.7	145	20.0	508	36	727	-	4.5
155/80 R13	79T	V31538	9.4	7.5	6.2	157	23.0	584	36	963	-	4.5
155/70 R13	75T	V31501	10.1	8.0	6.1	155	21.7	551	36	853	-	4.5
155/65 R14	75T	V31511	10.1	8.0	6.0	152	22.0	559	36	853	-	4.5
165/70 R13	79T	V31502	10.1	8.0	6.5	165	22.2	564	36	963	-	5.0
165/70 R13 REINF	83T	V31531	10.1	8.0	6.5	165	22.2	564	42	1073	-	5.0
165/70 R14	81T	V31504	10.1	8.0	6.6	168	23.3	592	36	1018	-	5.0
165/65 R14	79T	V31512	10.1	8.0	6.3	160	22.5	572	36	853	-	5.0
175/80 R14	88T	V31522	10.3	8.2	7.1	180	25.1	638	35	1234	-	5.0
175/70 R13	82T	V31503	10.1	8.0	7.1	180	22.9	582	36	1047	-	5.0
175/70 R14	84T	V31523	10.1	8.0	6.9	175	24.1	612	36	1102	-	5.0
175/70 R14 REINF	88T	V31516	10.1	8.0	6.9	175	24.1	612	42	1234	-	5.0
175/65 R13	80T	V31521	9.6	7.6	7.0	178	22.1	561	36	992	-	5.0
175/65 R14	82T	V31505	10.1	8.0	6.7	170	22.9	582	36	1047	-	5.0
175/65 R14 REINF	86T	V31532	10.1	8.0	6.7	170	22.9	582	42	1168	-	5.0
175/65 R15	84T	V31533	10.1	8.0	6.9	175	24.2	615	36	1102	-	5.0
185/70 R14	88T	V31539	10.7	8.5	7.6	193	24.5	622	36	1234	-	5.5
185/65 R14	86T	V31506	10.7	8.5	7.2	183	23.5	597	36	1168	-	5.5
185/65 R15	88T	V31507	10.7	8.5	7.2	183	24.6	625	36	1234	-	5.5
185/60 R14	82T	V31509	10.7	8.5	7.1	180	23.0	584	36	1047	-	5.5
185/60 R15 REINF	88T	V31530	10.7	8.5	7.0	178	23.5	597	42	1168	-	5.5
185/55 R15 REINF	86T	V31519	10.7	8.5	7.1	180	23.0	584	42	1168	-	6.0
195/70 R14 REINF	95T	V31527	11.3	9.0	8.1	206	25.2	640	42	1521	-	6.0
195/65 R15	91T	V31508	11.3	9.0	8.0	203	25.2	640	36	1355	-	6.0
195/65 R15	95T	V31540	11.2	8.9	8.0	203	25.2	640	42	1521	-	6.0
195/60 R15	88T	V31517	11.3	9.0	7.6	193	24.3	617	36	1234	-	6.0
195/55 R15	85H	V31524	11.3	9.0	7.4	188	23.5	597	36	1135	-	6.0
195/50 R15	82H	V31529	11.3	9.0	7.2	183	22.9	582	36	1047	-	6.0
205/65 R15	94T	V31514	11.3	9.0	8.2	208	25.5	648	36	1477	-	6.0
205/65 R15C	102/101T	V31541	12.0	9.5	8.5	216	25.5	648	65	1873	-	6.0
205/60 R16	92H	V31518	11.0	8.7	8.0	203	25.6	650	36	1708	-	6.0
205/55 R16	91H	V31510	11.3	9.0	8.1	206	25.0	635	36	1355	-	6.5
205/55 R16 REINF	95H	V31535	11.3	9.0	8.1	206	25.0	635	42	1521	-	6.5
215/65 R15	96T	V31515	11.1	8.8	8.2	208	26.1	663	36	1565	-	6.0
215/55 R16	97H	V31520	11.3	9.0	8.2	208	25.5	648	42	1609	-	7.0
225/55 R16 REINF	99H	V31525	10.8	8.6	8.5	216	25.9	658	42	1708	-	7.0

WINTER SEASON II



Silica Compound Featuring New Ribbed Center Grooves for Added Snow Grip and Enhanced Wet Traction. Taking studless snow tire performance to the next level. Severe Service Tested and Approved.



Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
205/50 R17	93H	V33403	11.1	8.8	7.9	201	24.9	632	42	1433	-	7.0
215/70 R15	98T	V33401	11.3	9.0	8.7	221	27.2	691	36	1653	-	6.5
215/65 R16	98H	V33402	11.0	8.7	7.9	201	27.2	691	36	1653	-	6.5



SUV / LT Winter
Studdable

WINTER SEASON IV



Silica Compound.

Same great snow tire design as the WS II but added features including square shoulder profile for lateral snow traction. Scalloped shoulders for improved deep snow traction. Reinforced stud holes to offer studded snow tire confidence. Severe Service Tested and Approved.



Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
P215/60 R16	94H	V33802	12.0	9.5	8.2	208	26.1	663	35	1477	-	6.5
P215/50 R17	93H	V33803	11.8	9.4	8.1	206	25.3	643	41	1433	-	7.0
P225/60 R16	97H	V33801	12.0	9.5	8.7	221	26.4	671	35	1609	-	6.5
P235/70 R16	104T	V33805	12.6	10.0	9.1	231	28.6	726	35	1984	-	7.0
P245/65 R17	105S	V33806	12.6	10.0	9.4	239	29.4	747	35	2039	-	7.0
P265/70 R17	113S	V33804	12.3	9.8	10.3	262	31.3	795	35	2535	-	8.0
P275/65 R18	114T	V33807	12.6	10.0	9.0	229	32.0	813	36	2601	-	8.0
P275/60 R18	111T	V33808	13.2	10.5	10.2	259	30.7	780	35	2403	-	8.0

TAIGA ICE AXE

SUV / LT Winter
Studdable




- Pinned for Studs and LT Construction w/Silica
- 5 LARGE CIRCUMFERENTIAL GROOVES
Zig-Zag for optimum snow traction
- Multitude of horizontal grooves and wavy sipes
for snow biting and ice grabbing traction
- Multiple Pitch Variation for low noise and smooth ride
- Large Scalloped Shoulder Blocks for added deep snow traction
- Severe Service Tested and Approved



Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
LT225/75 R16	115Q	V33902	13.5	10.7	8.6	218	29.0	737	80	2680	15	6.0
LT245/75 R16	120S	V33905	15.1	12.0	9.6	244	30.2	767	80	3086	15	7.0
LT245/70 R17	119R	V33906	15.1	12.0	9.7	246	30.1	765	80	2997	15	7.0
LT265/75 R16	123Q	V33904	14.9	11.8	10.1	257	31.3	795	80	3415	15	7.0
LT265/70 R17	121R	V33901	15.1	12.0	10.5	267	31.3	795	80	3196	15	8.0
LT275/70 R18	125S	V33903	15.1	12.0	10.6	269	33.0	838	80	3637	15	8.0



■ WINTER

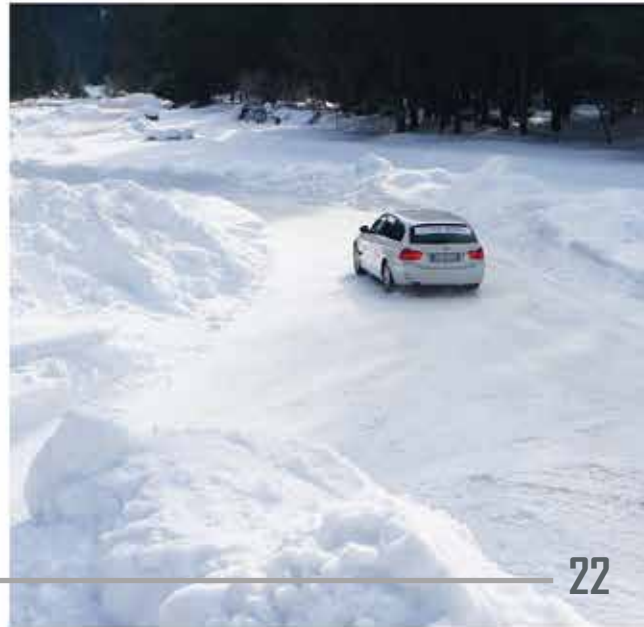

COMMERCIAL



MARATHON EVO



- The Next Evolution In Commercial Light Truck Tires
- Zig-Zag Circumferential Grooves For Excellent Wet Traction and Snow Traction
- Constant Contact Lugs for Low Noise, Outstanding Load Carrying Capacity
- Multiple Pitch Variation Shoulder Lugs for Smooth Quiet Ride

Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
175 R14C	99/98G	V32126	11.3	9.0	7.0	178	25.1	638	65	1708	400 AA	5.0
185 R14C	102/100R	V32113	11.3	9.0	7.4	188	25.7	653	65	1873	400 AA	5.5
195 R14C	106/104R	V32114	12.0	9.5	7.7	196	26.4	671	65	2094	400 AA	5.5
195 R15C	106/104S	V32115	12.0	9.5	7.8	198	27.3	693	65	2094	400 AA	5.5
195/70 R15C	104/102R	V32103	12.0	9.5	7.9	201	25.9	658	65	1984	400 AA	6.0
195/65 R16C	104/102R	V32108	11.7	9.3	7.7	196	25.9	658	69	1984	400 AA	6.0
195/60 R16C	99/97T	V32112	11.7	9.3	7.5	191	25.4	645	54	1708	400 AA	6.0
205/75 R16C	110/108R	V32101	12.0	9.5	7.9	201	28.2	716	69	2336	400 AA	6.5
205/70 R15C	106/104R	V32104	12.2	9.7	8.1	206	26.5	673	65	2094	400 AA	6.5
205/65 R15C	102/100T	V32107	12.0	9.5	8.5	216	25.5	648	65	1873	400 AA	6.0
205/65 R16C	107/105R	V32109	12.0	9.5	7.8	198	26.6	676	65	2149	400 AA	6.5
215/75 R16C	113/111R	V32102	12.3	9.8	8.6	218	28.7	729	69	2535	400 AA	6.0
215/75 R16C	116/114N	V32116	12.3	9.8	8.6	218	28.7	729	69	2755	400 AA	6.0
215/70 R15C	109/107R	V32105	12.0	9.5	8.5	216	26.8	681	65	2094	400 AA	6.5
215/65 R16C	109/107R	V32110	12.0	9.5	8.5	216	26.8	681	69	2270	400 AA	6.5
225/70 R15C	112/110R	V32106	12.0	9.5	8.9	226	27.3	693	65	2468	400 AA	6.5
225/65 R16C	112/110R	V32111	12.0	9.5	8.7	221	27.3	693	69	2468	400 AA	6.5

V22



Intended for all Light Truck uses on paved roads or soft tracks, V22 is durable and gives good grip.

Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
175 R14C	99/98Q	V30601	10.5	8.3	6.8	173	25.0	635	65	1708	-	5.0
185 R14C	102/100R	V30602	11.1	8.8	7.4	188	25.4	645	65	1873	-	5.5
195 R14C	106/104P	V30603	12.6	10.0	7.7	196	26.5	673	65	2094	-	5.5
205 R14C	109/107P	V30604	12.6	10.0	8.4	213	27.5	699	65	2270	-	6.0

SPECIALITY



TRAIMATE 341



Trailer Tires built for the long-haul.

Solid Center Rib	Provides additional load Support while ensuring the tire wears evenly
4 wide Circumferential Grooves	The most efficient way of evacuating water from the tread surface enabling outstanding wet traction
Cross Groves & Sipes	For wet traction and to reduce heat build-up that can cause tire damage.

Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
ST 175/80 R13	6 Ply	V34106	9.8	7.8	6.9	175	24.0	610	50	1360	-	5.0
ST 205/75 R14	6 Ply	V34107	9.8	7.8	7.9	201	26.1	663	50	1760	-	5.5
ST 205/75 R15	6 Ply	V34108	9.8	7.8	7.9	201	27.1	688	65	1820	-	5.5
ST 205/75 R15	8 Ply	V34109	9.8	7.8	7.9	201	27.1	688	65	2150	-	5.5
ST 215/75 R14	6 Ply	V34110	10.1	8.0	8.5	216	26.7	678	50	1870	-	6.0
ST 225/75 R15	8 Ply	V34105	10.1	8.0	8.4	213	28.1	714	65	2540	-	6.0
ST 225/75 R15	10 Ply	V34101	10.1	8.0	8.4	213	28.1	714	80	2830	-	6.0
ST 235/85 R16	10 Ply	V34111	10.1	8.0	9.0	229	30.6	777	80	3416	-	6.5
ST 235/80 R16	8 Ply	V34104	10.1	8.0	9.0	229	30.6	777	65	3000	-	6.0
ST 235/80 R16	10 Ply	V34102	10.1	8.0	9.0	229	30.6	777	80	3416	-	6.5

TRAIMATE 330



For Work or For Fun, the Trimate Supports Trailer Liads for the Long Haul.

Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
195/55 R10C	98/96P	V33001	11.3	9.0	7.6	193	18.5	470	90	1653	-	6.0
225/55 R10	104/102N	V33002	9.2	7.3	8.5	216	19.6	498	90	1984	-	6.5
185/60 R12C	104/101N	V33003	10.5	8.3	6.9	175	20.9	531	94	1984	-	6.0
195/50 R13C	104/101N	V33004	10.6	8.4	7.3	185	20.9	531	94	1984	-	6.0

TRAIMATE 307



Tough Strong Trailer Tire for Light Load Application.

Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
145/70 R12	69T	V30701	8.7	6.9	5.9	150	20.2	513	36	716	-	4.5
155/70 R12	73N	V30702	8.2	6.5	6.0	152	20.8	528	36	804	-	4.5
155/70 R12C	104/102N	V30703	9.1	7.2	6.0	152	20.9	531	90	1984	-	4.5

CITY STAR V2 [Trailer]



4 Rib All Season Tread pattern with Strong and Durable casing design for stable towing and load carrying capacity.

Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
145/80 R10	74N	V31224	8.2	6.5	5.5	140	19.4	493	40	827	400 AA	3.5
145/80 R13 REINF	79N	V31225	9.8	7.8	5.4	137	22.7	577	42	963	400 AA	4.0
155 R13C	91/89N	V31241	8.8	7.0	6.1	155	22.9	582	65	1355	400 AA	4.5
155/80 R13 REINF	84N	V31226	10.5	8.3	6.0	152	23.1	587	42	1102	400 AA	4.5
155/70 R13 REINF	78N	V31220	9.3	7.4	6.1	155	21.7	551	42	934	400 AA	4.5
165/80 R13 REINF	88N	V31227	9.8	7.8	6.4	163	23.1	587	42	1234	400 AA	4.5
165/70 R13 REINF	84N	V31221	9.4	7.5	6.7	170	22.2	564	42	1102	400 AA	5.0
175/70 R13 REINF	86N	V31222	10.5	8.3	7.0	178	22.8	579	42	1168	400 AA	5.0
175/65 R14C	90/88T	V31230	10.6	8.4	6.7	170	22.9	582	65	1708	400 AA	5.0
185/70 R13 REINF	92N	V31223	10.1	8.0	7.5	191	23.5	597	42	1388	400 AA	5.5
195/70 R14 REINF	96N	V31235	9.7	7.7	7.8	198	24.6	625	42	1565	400 AA	6.0
195/65 R15 REINF	95N	V31234	9.6	7.6	7.5	191	24.8	630	42	1521	400 AA	6.0


V 329



For Old Citroen

Ideal for classics like the Citroen, the V329 offers good all-season traction and steel belted reliability.

Size	Load/Speed	Product Code	Tread Depth (1/32")	Tread Depth (mm)	SW (Inch)	SW (mm)	OD (Inch)	OD (mm)	Max Air (PSI)	Max. Load (LBS)	UTQG Rating	Measuring Rim (Inch)
125 R15	68S	V32901	7.6	6.0	5.0	127	23.7	602	51	694	-	3.5
**135 R15	72S	V32902	7.6	6.0	5.4	137	23.5	597	42	780	-	4.0
**155 R15	82S	V32903	7.6	6.0	6.2	157	24.8	630	32	1048	-	4.5

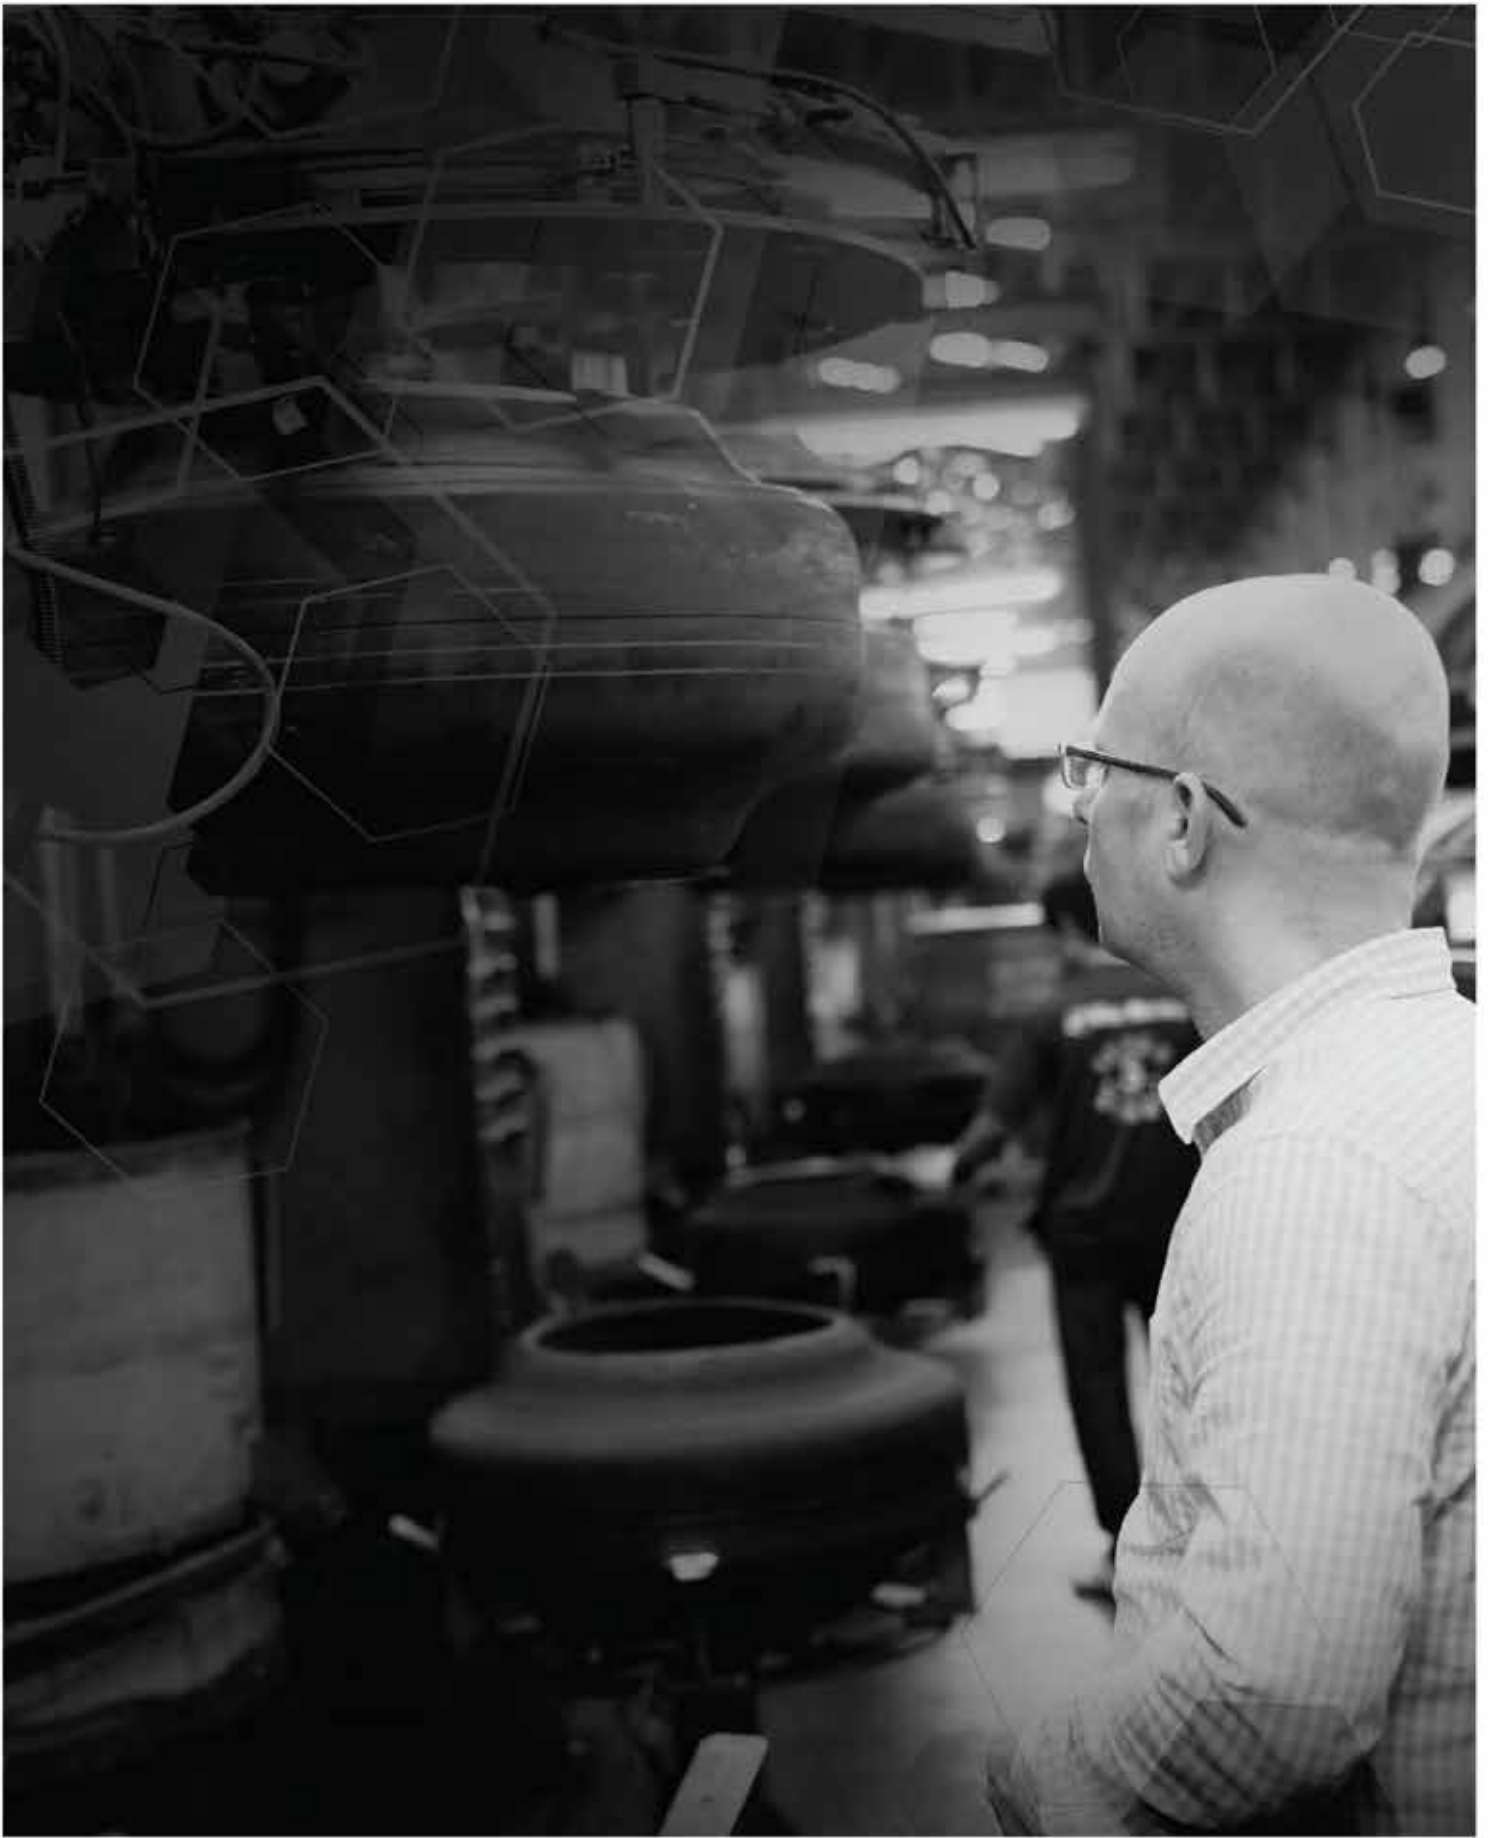

" VEE RUBBER'S GOAL IS TO MANUFACTURE TYRES OF HIGHEST QUALITY AND PERFORMANCE AT AFFORDABLE PRICES AND TREATING OUR CUSTOMERS WITH INTEGRITY AND RESPECT. "

The Pride of Thailand...



VEE RUBBER

924 RAMA 9 ROAD, BANGKAPI, HUAY-KWANG, BANGKOK 10310, THAILAND.
TEL. [+66] 2 719-6644 FAX: [+66] 2 719-6661

WWW.VEERUBBER.CO.TH

E-MAIL: INFO@VEERUBBER.CO.TH

INNOVATION
AND VARIETY **SINCE 1977**