



THAILAND



Vee Rubber

PERFORMANCE TIRES

MADE IN THAILAND

OFF-THE-ROAD TIRES

**EARTHMOVER
TIRES**

**GRADER
TIRES**

**FORKLIFT
TIRES**

**AGRICULTURE
TIRES**

**INDUSTRIAL
TRACTOR
TIRES**

USA OFFICE

3602 Browns Mill
Road SE Atlanta, GA 30354

EMAIL : info@veerubberusa.com

WWW.VEERUBBERUS.COM

**THAILAND
HEAD OFFICE**

924 Vee Rubber building,
Rama 9 Road, Bangkok,
Huay-Kwang, Bangkok
10310, Thailand

EMAIL : info@veerubber.co.th

WWW.VEERUBBER.CO.TH



EARTHMOVER TIRES BIAS

Recommended for heavy dump trucks, scrapers and loaders under the condition of a variety of assignments, with wide generality, special tread compounds design and powerful body structure design, make it has excellent heat resistant abrasion resistance and good performance, increase durability for mine construction.

Size	Ply rating	Type		Standard rim - Inch	Overall Diameter mm	Maximum load kgs / lbs	inflation Pressure Kpa / Psi
		TL	TT				
15.5-25	12	●		12.00	1278	3250 / 7150	250 / 36
15.5-25	16	●		12.00	1278	3750 / 8250	325 / 47
17.5-25	16	●		14.00	1348	4250 / 9350	300 / 44
17.5-25	20	●		14.00	1348	5000 / 1100	400 / 58
20.5-25	20	●		17.00	1493	6000 / 13200	325 / 47
20.5-25	24	●		17.00	1493	6700 / 14770	400 / 58



GRADER/LOADER TIRES BIAS

Recommended for grader ,loader excavators and bulldozers works well on soft muddy ground, can play a great traction, and good self-cleaning wide tread provides good buoyancy, it has excellent driving performance on the muddy road

Size	Ply rating	Type		Standard rim - Inch	Overall Diameter mm	Maximum load kgs / lbs	inflation Pressure Kpa / Psi
		TL	TT				
1400-24	12	●	●	8.00 TG	1348	3075 / 6800	250 / 36
1400-24	14	●	●	8.00 TG	1348	3450/7600	300 / 44


MADE IN THAILAND



**INDUSTRIAL
TIRES
BIAS
(SUITABLE FOR PORT USE)**

It is recommended for the terminal port crane and heavy crane series (empty container transfer, reach stack) is generally used for front and rear wheels & fork track, strong carcass, not void, not bulging, good wear resistance, good performance of resistance to penetration and also stable running, special design has strengthened tire circle because the rear wheel of fork track was frequently used, so our tires is the best choice for port machinery..

Size	Ply rating	Type		Standard rim - Inch	Overall Diameter mm	Maximum load kgs / lbs	inflation Pressure Kpa / Psi
		TL	TT				
12.00-20	28		●	8.50	1150	8520 / 18783	1027 / 149

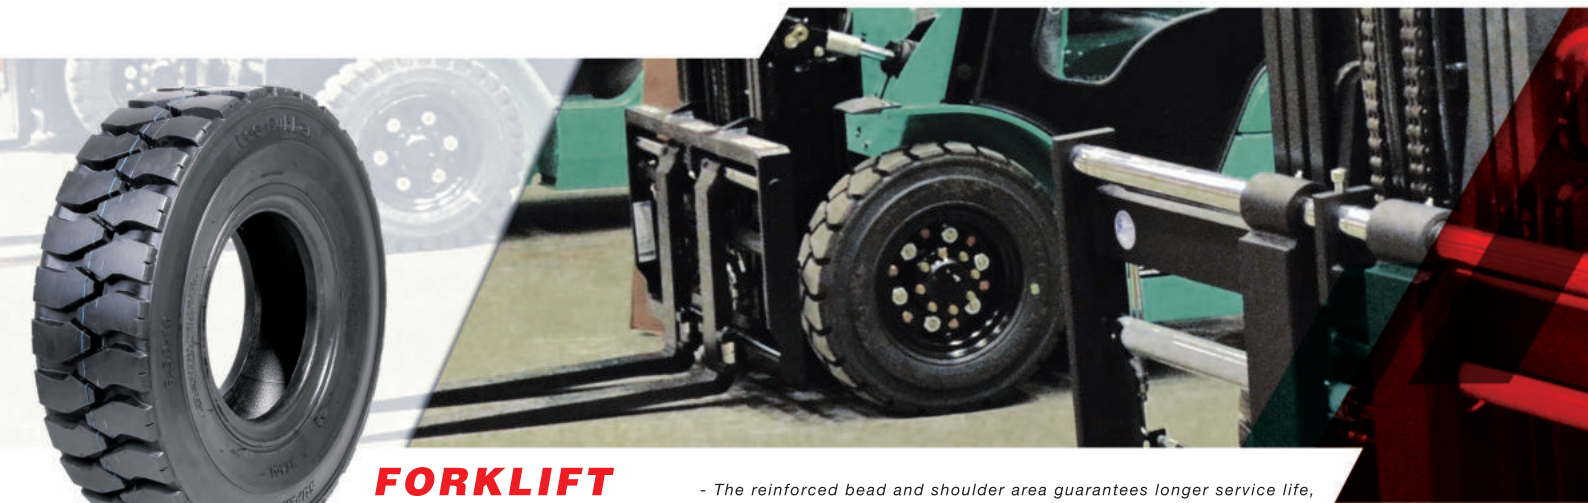

**FORKLIFT
TIRES
BIAS
(PNEUMATIC)**

- The reinforced bead and shoulder area guarantees longer service life, and more mileage due to harder tread compound.
- It also provides exceptional resistance to puncture and damages on heavy jobs conditions.

Size	Ply rating	Type		Standard rim - Inch	Overall Diameter mm	Maximum load kgs / lbs	inflation Pressure Kpa / Psi
		TL	TT				
500-8	8		●	3.00	469	830 / 1830	790 / 115
690/600-9	10		●	4.00	545	1515 / 3340	860 / 125
650-10	10		●	5.00	597	1725 / 3805	790 / 115
700-12	12		●	5.00	683	2445 / 5395	860 / 125
700-15	14		●	6.00	762	3090 / 6810	1000 / 145
28 X 9 - 15 (8.15-15)	14		●	7.00	706	3075 / 6775	970 / 140
825-15	14		●	6.50	847	3830 / 8445	830 / 120

MADE IN THAILAND


Excellent traction, self-cleaning Patterns
 Increased Anti-Ozone/Aging compounds
 for longer services and durability.

IRRIGATION TIRES BIAS



Size	Ply rating	Type		Standard rim - Inch	Overall Diameter mm	Maximum load kgs / lbs	inflation Pressure Kpa / Psi
		TL	TT				
11.2-24	8	●		10.00	1103	1150 / 2540	250 / 36
11.2-38	8	●		10.00	1205	1000 / 2200	180 / 26



TRACTOR TIRES BIAS

SUPERFLOWER

SIZE	Ref. Name Pattern Name	Ref. Name Pattern Name(SKU)	PR	TYPE		STANDARD RIM (Inch)	OVERALL DIAMETER (mm)	MAXIMUM LOAD		INFLATION PRESSURE	
				TL	TT			KGS	LBS	Kpa	PSI
8-16	TRACTOR (FRONT) / SUPERFLOWER	VTR 148	6		/	6	819	615	1360	240	35
12.4-24	TRACTOR (REAR) / SUPERFLOWER	VTR 148	8		/	11	1192	1285	2830	160	23
8-18	TRACTOR (FRONT) / SUPERFLOWER	VTR 148	6		/	6	873	670	1480	240	35
13.6-26	TRACTOR (REAR) / SUPERFLOWER	VTR 148	8		/	12	1296	1450	3200	160	23